



TIMERS

DELAY ON OPERATE



UL FILE #E101681



BASIC MODELS:


021-024-XXXX
021-120-XXXX

FEATURES:

Solid State Circuitry
Standard Timing Ranges
DPDT 10A Relay
Plug In Base
Economical, Easy to Install


OPERATION

The 021 timer offers a delay on operate function. The timing range is user specified up to one hour. The timer can be manually set to any time within the selected range. Timing is initiated by application of power to the timer. Upon completion of the timing cycle, the output relay will energize.

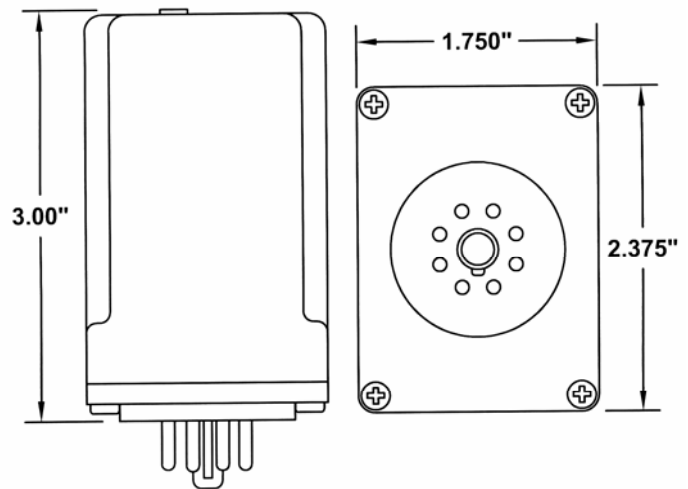

SPECIFICATIONS

Supply Voltage:	24, 120 VAC \pm 10% 1 Phase 50/60 Hz
Relay Type:	DPDT
Output Rating:	10A Resistive @ 240VAC 3.6A Inductive @ 240VAC
Power Dissipation:	Less Than 1 Watt
Operating Temp:	-40°C to +60 °C
Storage Temp:	-45°C to +85 °C
Typical Reset Time:	30 ms
Enclosure:	White Lexan
Base:	Phenolic



ORDERING INFORMATION

021 - XXX - XXXX
 Product Type _____
 Operating Voltage _____
 024 = 24VAC,
 120 = 120VAC
 Timing Range _____

0010 = 1 to 10 seconds	0200 = 20 to 200 seconds
0020 = 2 to 20 seconds	0300 = 30 to 300 seconds
0030 = 3 to 30 seconds	0600 = 60 to 600 seconds
0060 = 6 to 60 seconds	0900 = 90 to 900 seconds
0090 = 9 to 90 seconds	1200 = 120 to 1200 seconds
0120 = 12 to 120 seconds	1800 = 180 to 1800 seconds
0180 = 18 to 180 seconds	3600 = 360 to 3600 seconds